



HAKU-KIERRESATULAT

Tilausnro 5250	HAKU-kierresatula PE- ja PVC-putkille, PN 16
-------------------	---

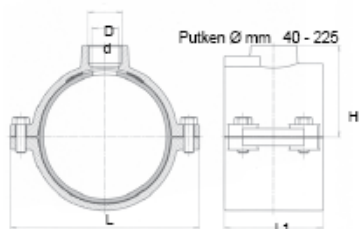

Putken Ø mm 250 - 500 (ruostumattomalla terässangalla)



Putken Ø mm	D	d Ø	H	L	L1	Paino
40	3/4"	24	40	98	70	0,95
	1"	27	42			0,95
50	1"	27	50	110	80	1,20
	1 1/4"	33	52			1,20
63	1 1/2"	33	62	124	100	2,00
	2"	40	62			1,90
	2"	40	68			2,10
	2"	40	68			2,15
75	1"	27	63	135	110	2,25
	1 1/4"	33	68			2,20
	1 1/2"	40	68			2,30
	2"	50	73			2,80
90	1"	27	71	150	110	2,70
	1 1/4"	33	75			2,60
	1 1/2"	40	75			2,70
	2"	50	80			3,60
110	1"	27	81	170	120	3,60
	1 1/4"	33	85			3,60
	1 1/2"	40	85			3,60
	2"	50	90			3,70
125	1"	27	87	192	120	4,15
	1 1/4"	33	93			4,15
	1 1/2"	40	93			4,10
	2"	50	98			4,30
140	1"	27	96	208	130	4,40
	1 1/4"	33	100			4,60
	1 1/2"	40	100			4,60
	2"	50	106			5,50
160	1"	27	106	230	150	6,10
	1 1/4"	33	111			6,30
	1 1/2"	40	111			6,20
	2"	50	116			8,00
180	1"	27	125	262	180	8,00
	1 1/4"	33	125			8,10
	1 1/2"	40	127			8,10
	2"	50	127			8,10
200	1"	30	132	282	180	8,10
	1 1/4"	33	132			7,80
	1 1/2"	40	137			8,30
	2"	50	137			8,10
225	1"	27	143	310	180	9,10
	1 1/4"	33	145			9,40
	1 1/2"	40	145			9,70
	2"	50	150			9,60
250	1"	27	163	202	120	3,70
	1 1/4"	36	163			3,70
	1 1/2"	44	163			3,30
	2"	50	163			3,30
280	1"	27	176	204	120	3,60
	1 1/4"	36	176			3,60
	1 1/2"	44	176			3,30
	2"	50	176			3,30
	2"	51	178			14,20
	2"	51	178			3,80
315	1"	27	196	200	120	3,80
	1 1/4"	36	196			3,75
	1 1/2"	44	196			3,55
	2"	50	196			3,55
400	2"	51	196	408	180	16,70
	2"	51	196			3,80
450	1 1/2"	40	243	270	120	4,90
	2"	50	243			4,90
450	1 1/2"	40	268	236	120	4,60
	2"	50	268			4,60
500	1 1/2"	40	292	256	120	4,90
	2"	50	292			4,90

HUOMIO !

Putket Ø 280 - 500 mm (sangalliset mallit)

Käytettäessä sangka-malli satulaa PE putkille täytyy putken vakiomittasuhteen olla SDR 11 tai parempi (SDR 9, SDR 7,4)